


# EVT800

Connected to two panels



-Type B

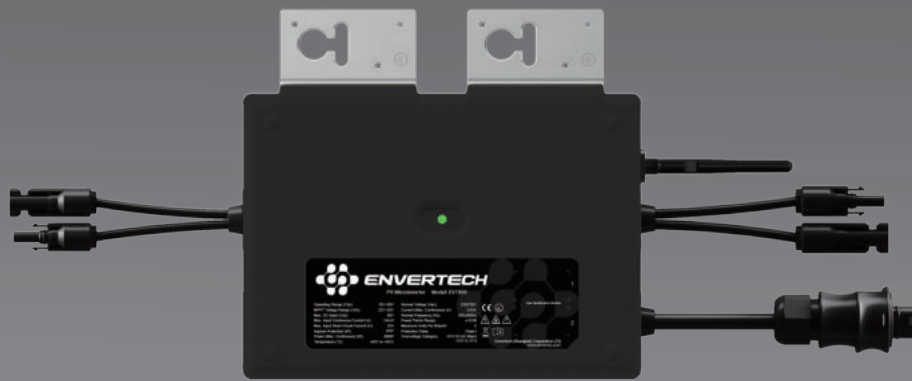

## SAFE

Low DC voltage.



## QUALITY

Components selected from world-class brands.



## MONITORING

Built-in WiFi or additional monitoring device\* available.



## FLEXIBILITY

Adapts to any system size and optimizes space.



## PLUG & PLAY

No End cap required. Perfect for balcony or garden installations.



## 15 YEARS

Long 25 years lifetime; optional up to 20 years warranty.



## MODULE-LEVEL

Module-level optimization & monitoring.

Monitoring device\*: Monitoring devices are optional at extra cost.



## Monitoring

Enables users to manager the systems in a smart digital ways via PLCC or Built-in Wifi.

# DATASHEET

Model	EVT800
<b>Input Data (DC)</b>	
Recommended Input Power Range(STC)	(180W-550W+)*2
Max. DC Input (V)	60V
Isc PV (Absolute Max.) (A)	25A
Operating Range (V)	16V-60V
Max. Input Current (A)	14A*2
MPPT Voltage Range (V)	22V-50V
<b>Output Data (AC)</b>	
Normal Voltage (Vac)	220V/230V
Voltage Range (Vac)	189-260V
Current (Max.continuous) (A)	3.63A
Frequency (Hz)	50Hz/60Hz
Frequency Range (Hz)	47.5-52.5Hz/57.5-62.5Hz
Power (Max.continuous) (W)	800W
Power Factor/Rated (default)	+/-0.90
Total Harmonic Distortion	<3%
Maximum Units Per Branch (12AWG Cable)	N/A
<b>Efficiency</b>	
Peak Efficiency	96.8%
MPPT Efficiency	99.9%
Nighttime Power Consumption	<100mW
<b>Features</b>	
Communication	PLCC(Power Line Carrier Communication) / Wi-Fi
Compliance	LVD 2014/35/EU, EMC 2014/30/EU, RED 2014/53/EU, ROHS, REACH, EN 50549-1/10, IEC 62116&IEC 61727, VDE-AR-N 4105, VFR 2019, UTE C15-712-1, DIN VDE V 0126-1-1, C10/11, TOR, CEI 0-21, NC-RfG, NA/EEA-NE7 – CH 2020, PPDS:2018, NTS
Warranty	15 years (20 years optional)
<b>Others</b>	
Ingress Protection (IP)	IP 67
Protective Class	Class I
Temperature (C)	-40°C to +65°C
Relative Humidity	0% - 98%
Overvoltage Category	OVC III (AC Main), OVC II (PV)
Inverter Isolation	☒ High Frequency Isolated
Weight	3.7kg
Dimensions (W*H*D)	264mm*194mm*35.5mm

# EVT800

Connected to two panels



-Type P



## SAFE

Low DC voltage.



## QUALITY

Components selected from world-class brands.



## OPTIMIZATION

Individual MPPT for each module.



## FLEXIBILITY

Adapts to any system size and optimizes space.



## PLUG & PLAY

Hand-in-hand design, fewer add-ons, and fast installation.



## 15 YEARS


Long 25 years lifetime; optional up to 20 years warranty.



## SMART\*

Module-level online smart monitoring.

Smart\*: Smart monitoring devices are optional at additional cost.



## Monitoring Device EVB300


Communicates with Envertech microinverters and enables users to manage the systems in a smart digital way.

# DATASHEET

Model	EVT800
<b>Input Data (DC)</b>	
Recommended Input Power Range(STC)	(180W-550W+)*2
Max. DC Input (V)	60V
Isc PV (Absolute Max.) (A)	25A
Operating Range (V)	16V-60V
Max. Input Current (A)	14A*2
MPPT Voltage Range (V)	22V-50V
<b>Output Data (AC)</b>	
Normal Voltage (Vac)	220V/230V
Voltage Range (Vac)	189-260V
Current (Max.continuous) (A)	3.63A
Frequency (Hz)	50Hz/60Hz
Frequency Range (Hz)	47.5-52.5Hz/57.5-62.5Hz
Power (Max.continuous) (W)	800W
Power Factor/Rated (default)	+/-0.90
Total Harmonic Distortion	<3%
Maximum Units Per Branch (12AWG Cable)	6 Units
<b>Efficiency</b>	
Peak Efficiency	96.8%
MPPT Efficiency	99.9%
Nighttime Power Consumption	<100mW
<b>Features</b>	
Communication	PLCC(Power Line Carrier Communication)
Compliance	LVD 2014/35/EU, EMC 2014/30/EU, RED 2014/53/EU, ROHS, REACH, EN 50549-1/10, IEC 62116&IEC 61727, VDE-AR-N 4105, VFR 2019, UTE C15-712-1, DIN VDE V 0126-1-1, C10/11, TOR, CEI 0-21, NC-RfG, NA/EEA-NE7 – CH 2020, PPDS:2018, NTS
Warranty	15 years (20 years optional)
<b>Others</b>	
Ingress Protection (IP)	IP 67
Protective Class	Class I
Temperature (C)	-40°C to +65°C
Relative Humidity	0% - 98%
Overvoltage Category	OVC III (AC Main), OVC II (PV)
Inverter Isolation	☒ High Frequency Isolated
Weight	4.1kg
Dimensions (W*H*D)	264mm*194mm*35.5mm

# EVT800

Connected to two panels

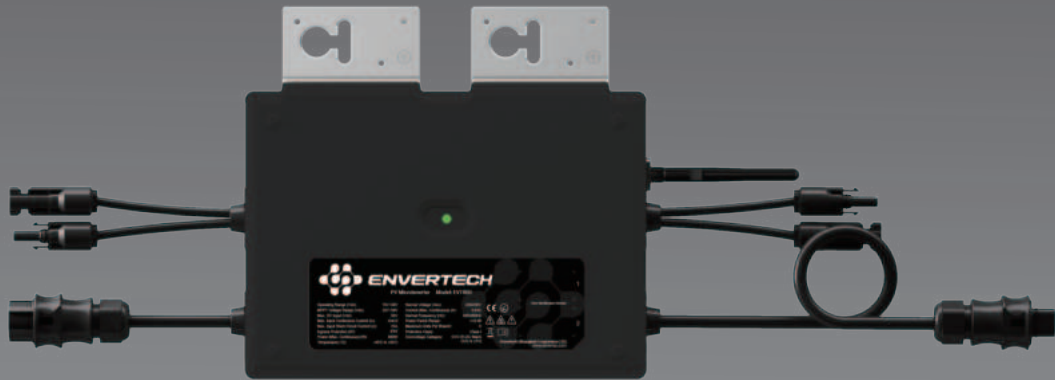

-Type R



## SAFE

Low DC voltage.



## QUALITY

Components selected from world-class brands.



## MONITORING

Built-in WiFi or additional monitoring device\* available.



## FLEXIBILITY

Adapts to any system size and optimizes space.



## PLUG & PLAY

Hand-in-hand design, fewer add-ons, and fast installation.



## 15 YEARS

Long 25 years lifetime; optional up to 20 years warranty.



## MODULE-LEVEL

Module-level optimization & monitoring.

Monitoring device\*: Monitoring devices are optional at extra cost.



## Monitoring

Enables users to manager the systems in a smart digital ways via PLCC or Built-in Wifi.

# DATASHEET

Model	EVT800
<b>Input Data (DC)</b>	
Recommended Input Power Range(STC)	[180W-550W+]*2
Max. DC Input (V)	60V
Isc PV (Absolute Max.) (A)	25A
Operating Range (V)	16V-60V
Max. Input Current (A)	14A*2
MPPT Voltage Range (V)	22V-50V
<b>Output Data (AC)</b>	
Normal Voltage (Vac)	220V/230V
Voltage Range (Vac)	189-260V
Current (Max.continuous) (A)	3.63A
Frequency (Hz)	50Hz/60Hz
Frequency Range (Hz)	47.5-52.5Hz/57.5-62.5Hz
Power (Max.continuous) (W)	800W
Power Factor/Rated (default)	+/-0.90
Total Harmonic Distortion	<3%
Maximum Units Per Branch [12AWG Cable]	6 Units
<b>Efficiency</b>	
Peak Efficiency	96.8%
MPPT Efficiency	99.9%
Nighttime Power Consumption	< 100mW
<b>Features</b>	
Communication	PLCC(Power Line Carrier Communication) / Wi-Fi
Compliance	LVD 2014/35/EU, EMC 2014/30/EU, RED 2014/53/EU, ROHS, REACH, EN 50549-1/10, IEC 62116&IEC 61727, VDE-AR-N 4105, VFR 2019, UTE C15-712-1, DIN VDE V 0126-1-1, C10/11, TOR, CEI 0-21, NC-RfG, NA/EEA-NE7 – CH 2020, PPDS:2018, NTS
Warranty	15 years (20 years optional)
<b>Others</b>	
Ingress Protection (IP)	IP 67
Protective Class	Class I
Temperature (C)	-40 C to +65 C
Relative Humidity	0% - 98%
Overvoltage Category	OVC III (AC Main), OVC II (PV)
Inverter Isolation	☑ High Frequency Isolated
Weight	4.1kg
Dimensions (W*H*D)	264mm*194mm*35.5mm